

Retrofit LED Flat Panel Lights

Application

These 2-pack LED flat panel retrofit kits quickly transform outdated fluorescent fixtures into clean, modern, energy-efficient LED lighting. The upgrade takes just minutes—no removing the existing housing, no ceiling disruption, and no downtime—delivering better light quality and instant energy savings with a simple, streamlined installation. With uniform, low-glare illumination they're an ideal solution for offices, schools, healthcare spaces, and retail environments.



Product Features and Specifications

- 3 Selectable Wattages
- 3 Selectable Color Temperatures (3500K, 4000K, 5000K)
- Long 50,000hr LED Rated Life
- High Efficacy 125 Lumen/Per Watt
- 0-10V Dimmer Compatible
- Install Into Drop Ceilings

Certifications




Product Overview

Product Name	Product Size	Product Description
GT-RF14-3W3C-35-2PK	1X4	1x4 ft LED Flat Panel Retrofit Light, 3 Wattages, 3 Color Temperatures, 4400LM, 2-Pack
GT-RF22-3W3C-35-2PK	2X2	2x2 ft LED Flat Panel Retrofit Light, 3 Wattages, 3 Color Temperatures, 4400LM, 2-Pack
GT-RF24-3W3C-44-2PK	2X4	2x4 ft LED Flat Panel Retrofit Light, 3 Wattages, 3 Color Temperatures, 5500LM 2-Pack

Electrical Data


Product Name	Voltage Input	Power (Wattage)	Rated Life	Lumen	CRI	Color Temperature	Dimming
GT-RF14-3W3C-35-2PK	120-277V 50/60Hz	18 / 26 / 35	50,000 Hours	2,200 / 3,300 / 4,400	80	3500K / 4000K / 5000K	0-10V
GT-RF22-3W3C-35-2PK	120-277V 50/60Hz	18 / 26 / 35	50,000 Hours	2,200 / 3,300 / 4,400	80	3500K / 4000K / 5000K	0-10V
GT-RF24-3W3C-44-2PK	120-277V 50/60Hz	26 / 35 / 44	50,000 Hours	3,300 / 4,400 / 5,500	80	3500K / 4000K / 5000K	0-10V

Wiring Diagram

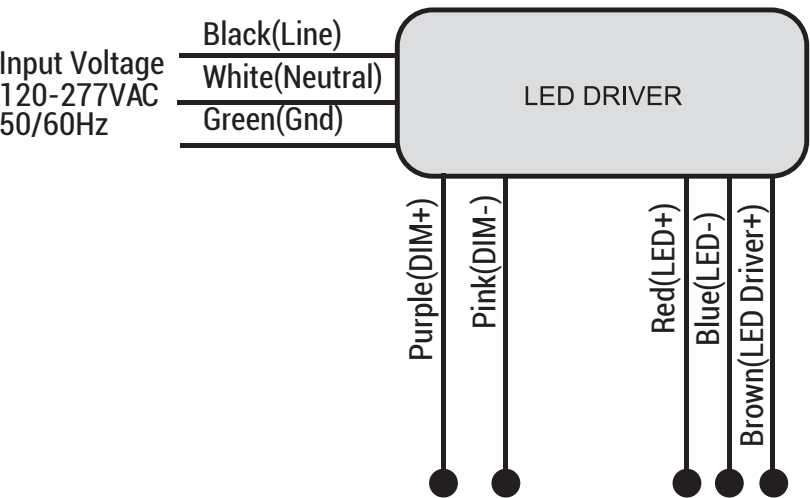


- 1. Dimming wires to 0-10V IEC compliant control
- 2. Purple(DIM+), Pink(DIM-): Dimming wires
- 3. Red(LED+), Blue(LED-) and Brown(LED Driver+): LED wires to LED load

Installation

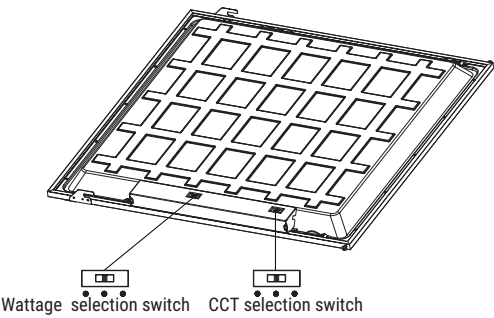


Product Measurements


GT-RF14-3W3C-35-2PK

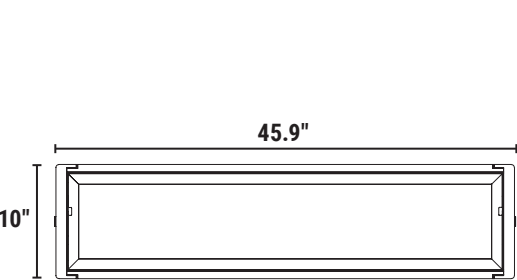

GT-RF22-3W3C-35-2PK



GT-RF24-3W3C-44-2PK

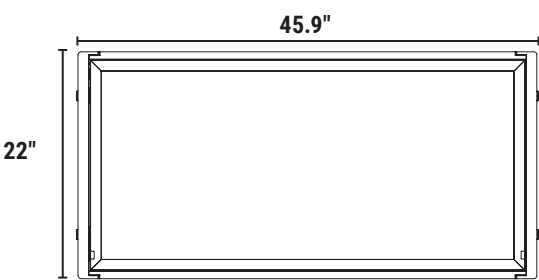

Warranty



This product is guaranteed against failure due to factory defects in materials or workmanship for five (5) years from the date of purchase. This warranty is non-transferable and applies only to the original owner. Proof of purchase required for repair or replacement. This warranty does not cover normal wear of parts or damage resulting from any misuse of the product. Misuse of the product includes but is not limited to: using in extreme weather conditions, opening the housing of the product, or attempted remodel/alterations made to product.

SKU(s):	
Sales Rep:	Notes:
Date:	
Project:	